

## 5113 RB

### CPVC Regular Body Cement



U.P Code  
pw-G-dwv-sw

## PRODUCT DATA SHEET

### DESCRIPTION

5113 RB is a solvent cement designed specifically for use in joining all types of CPVC (Chlorinated Poly Vinyl Chloride) pipe and fittings with interference fit CTS (copper tube size) thru 2" diameter . It is a fast setting, high strength CPVC Cement. 5113 RB meets 'LOW-VOC' requirements, as outlined by SCAQMD 1168/316A

### APPLICATION


5114HB is formulated for use on cold and hot water distribution systems up to 180° F in residential / commercial plumbing and industrial piping systems.

5114HB is manufactured to the high standard of ASTM D 2846 and F 493 to ensure a quality product. A sample is kept from each batch to verify the quality of US Weld cements.

Follow the directions on can label. Additional information is available upon request. Skill and knowledge on the part of the user is required to make a good quality joint.

### SAFETY PRECAUTIONS

**EXTREMELY FLAMMABLE.** Do not use or store near heat, sparks or flame. Use only in well-ventilated area. Keep container closed when not is use. Avoid prolonged breathing of vapor. Avoid contact with skin and eyes. In case of skin or eye contact, flush repeatedly with water. Get medical attention if irritation persists. If swallowed, drink water, do NOT induce vomiting and call a physician. Keep out of reach of children

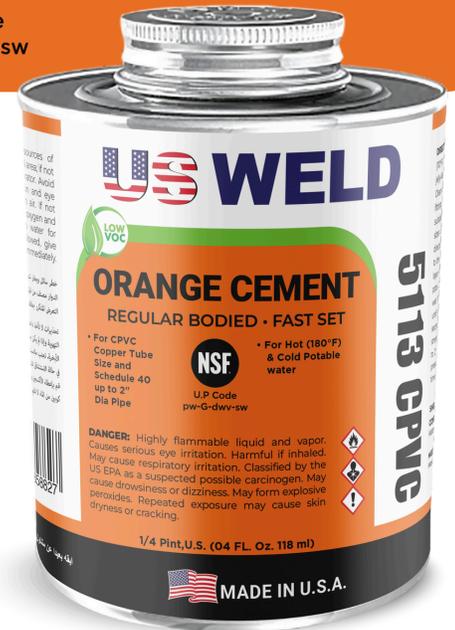



## TECHNICAL DATA

Product	Body	Color	Density	Set Time
5114 HB	Heavy	Orange	8.2 lb/gal	Fast

MAX VOC PER SCAQMD 1168/316A	490 G/L
SPECIFICATIONS	ASTM F 493 / D 2846, SCAQMD 1168/316A
HYDROSTATIC PRESSURE TEST	200 psi min. (180° F, 2-hour cure)
FLASH POINT	-4° F (closed cup)
SHELF LIFE	2 year minimum
LISTINGS	NSF (National Sanitation Foundation) U.P. Code (Uniform Plumbing Code)

## PACKAGING

Size	Size in Oz	Size in Ml	Units/Case	Cases/Pallet (20' container)	Cases/Pallet (40' container)
¼ Pt.	4	118	24	200	320
½ Pt.	8	237	24	117	182
Pint	16	473	12	128	192
Quart	32	946	12	70	100

