

5170 PIPE CLEANER



PRODUCT DATA SHEET

DESCRIPTION

5170 is a solvent cleaner for use on all types of plastics, including PVC, CPVC, ABS and Styrene plastic pipe and fittings. It will clean and slightly dissolve the surface of the pipe and fittings, providing better bonding surfaces for solvent cement when it is applied.

5170 meets 'LOW-VOC' requirements, as outlined by SCAQMD 1168/316A.

APPLICATION


5170 is a all purpose cleaner that is to be used in conjunction with primer and / or cement products. 5170 is manufactured to a high standard to ensure a quality product.

A sample is kept from each batch to verify the quality of US Weld products.

Follow the directions on can label. Additional information is available upon request. Skill and knowledge on the part of the user is required to make a good quality joint.

SAFETY PRECAUTIONS

EXTREMELY FLAMMABLE. Do not use or store near heat, sparks or flame. Use only in well-ventilated area. Keep container closed when not is use. Avoid prolonged breathing of vapor. Avoid contact with skin and eyes. In case of skin or eye contact, flush repeatedly with water. Get medical attention if irritation persists. If swallowed, drink water, do NOT induce vomiting and call a physician. Keep out of reach of children

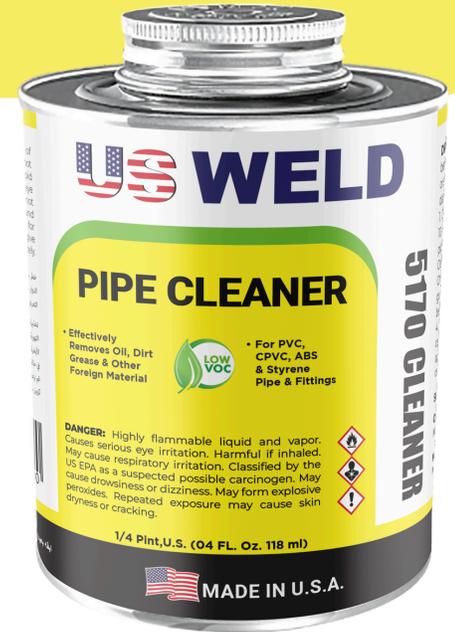



TECHNICAL DATA

Product	Viscosity	Color	Density
5170	Water- thin	Clear	6.7 lb/gal

MAX VOC PER SCAQMD 1168/316A	550 G/L
SPECIFICATIONS	SCAQMD 1168/316A
FLASH POINT	15° F (closed cup)
SHELF LIFE	2 year minimum

PACKAGING

Size	Size in Oz	Size in Ml	Units/Case	Cases/Pallet (20' container)	Cases/Pallet (40' container)
¼ Pt.	4	118	24	200	320
½ Pt.	8	237	24	117	182
Pint	16	473	12	128	192
Quart	32	946	12	70	100