

5195 FLEX PVC Medium Body Cement



U.P Code
pw-G-dwv-sw

PRODUCT DATA SHEET

DESCRIPTION

5195 FLEX is a clear, medium bodied, very fast setting solvent cement designed specifically for use in joining all types of flexible or rigid PVC (Poly Vinyl Chloride) pipe and fittings with interference fit through 6" diameter (Sch. 40) and 4" diameter (Sch. 80). It can also be used to join flexible vinyl to itself. 5195 FLEX can be used without primer where local codes permit. 5195 FLEX meets 'LOW-VOC' requirements, as outlined by SCAQMD 1168/316A..

APPLICATION


5195 FLEX is formulated for use on piping systems for swimming pools / spas, irrigation, potable water, DWV (drain, waste, vent), electrical conduit, ENT, well casing and sewer / drain applications.

5195 FLEX is manufactured to the high standard of ASTM D 2564 to ensure a quality product. A sample is kept from each batch to verify the quality of US WELD cements.

Follow the directions on can label. Additional information is available upon request. Skill and knowledge on the part of the user is required to make a good quality joint.

SAFETY PRECAUTIONS

EXTREMELY FLAMMABLE. Do not use or store near heat, sparks or flame. Use only in well-ventilated area. Keep container closed when not in use. Avoid prolonged breathing of vapor. Avoid contact with skin and eyes. In case of skin or eye contact, flush repeatedly with water. Get medical attention if irritation persists. If swallowed, drink water, do NOT induce vomiting and call a physician. Keep out of reach of children

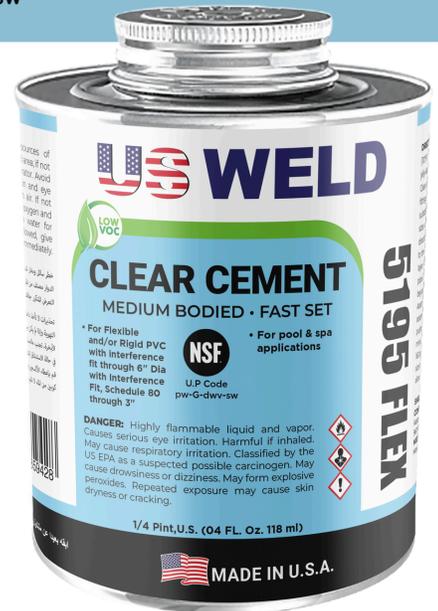



TECHNICAL DATA

Product	Body	Color	Density	Set Time
5195 FLEX	Medium	Clear	7.6 lb/gal	Very Fast

MAX VOC PER SCAQMD 1168/316A	510 G/L
SPECIFICATIONS	ASTM D 2564, SCAQMD 1168/316A
HYDROSTATIC PRESSURE TEST	400 psi min. (73° F, 2 hour cure)
FLASH POINT	-4° F (closed cup)
SHELF LIFE	3 year minimum
LISTINGS	NSF (National Sanitation Foundation) U.P. Code (Uniform Plumbing Code)

PACKAGING

Size	Size in Oz	Size in Ml	Units/Case	Cases/Pallet (20' container)	Cases/Pallet (40' container)
¼ Pt.	4	118	24	200	320
½ Pt.	8	237	24	117	182
Pint	16	473	12	128	192
Quart	32	946	12	70	100

